

## ProTac® 1AA / ProTac® 2AA

### HIGH PERFORMANCE ALKALINE FLASHLIGHT

**MARKET**
**APPLICATIONS:** Law Enforcement, Security, Emergency Medical Services, Sporting Goods, Hardware/Tool, Consumer

**DESCRIPTION:**

Compact &amp; powerful, the ProTac® series flashlights offer three different user selectable programs and the latest in power LED technology. The combination of small size and output from the C4® LED result in one of the brightest tactical personal carry lights for its' size. Packaged with a removable pocket clip and holster. (Models also available with CR123A lithium cells.)

**CASE MATERIAL:**

6000 series machined aircraft aluminum with anodized finish. Available in Black.

**DIMENSIONS:**

<b>ProTac® 1AA:</b> Length: 4.16 in. (10.57 cm) Head Diameter: 0.90 in. (2.29 cm) Barrel Diameter: 0.65 in. (1.65 cm)	<b>ProTac® 2AA:</b> Length: 6.14 in (15.60 cm) Major Diameter: 0.90 in. (2.29 cm) Barrel Diameter: 0.65 in. (1.65 cm)
--	--

**WEIGHT:**

<b>ProTac® 1AA:</b> 2.3 oz (65 grams) with battery*	<b>ProTac® 2AA:</b> 3.4 oz (96 grams) with batteries*
---	---

**LENS:**

Glass lens, o-ring sealed.

**LIGHT SOURCE:**

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:**

See charts for specific model. Optimized electronics provides regulated intensity.

**ON/OFF:**

Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

**RUN TIME:**

See charts for specific model. All claims to 10% of initial lumen output.

**BATTERY:**

<b>ProTac® 1AA:</b> One (1) AA alkaline battery.	<b>ProTac® 2AA:</b> Two (2) AA alkaline batteries.
--	--

 Use of Lithium AA batteries will extend run time.

**FEATURES:**

 C4® LED technology for extreme brightness.  
 LED Solid State Power Regulation provides maximum light output throughout battery life.  
 IPX7 rated design; waterproof to 1 meter for 30 minutes.  
 2 meter impact resistance tested.  
 TEN-TAP® programmable switch allows user to select one of three different programs.  
 Anti-roll facecap.  
 Removable pocket clip.  
 Serialized for positive identification.









**WARRANTY:**

Streamlight's Limited Lifetime Warranty.


**APPROVALS:**

 Meets applicable European Community directives. 
**OPTIONAL**
**ACCESSORIES:**

Holster.

	ProTac® 1AA			ProTac® 2AA		
	FL1 STANDARD	HIGH	LOW	FL1 STANDARD	HIGH	LOW
OUTPUT		<b>70</b> LUMENS	<b>5</b> LUMENS		<b>155</b> LUMENS	<b>11</b> LUMENS
RUNTIME		<b>2h</b>	<b>32h</b>		<b>2h</b>	<b>36h</b>
DISTANCE		<b>76m</b>	<b>22m</b>		<b>115m</b>	<b>28m</b>
INTENSITY		<b>1,450cd</b>	<b>125cd</b>		<b>3,300cd</b>	<b>200cd</b>

1AA Strobe Runtime: 4 hours      2AA Strobe Runtime: 4 hours

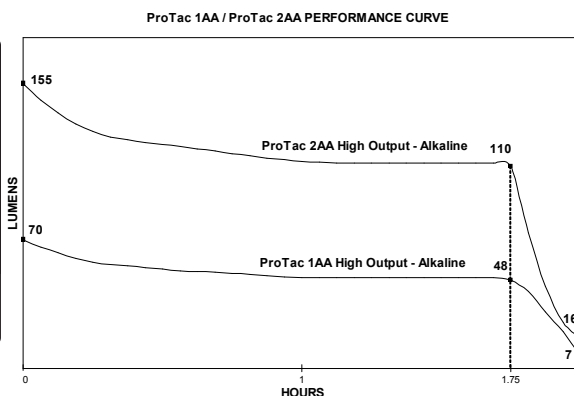

\* Alkaline battery(s) included with purchase

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 12/23/09

Revised: 04/12/16 Rev: 5

Made In China

Document #211